

# DT LINE | SPC | 7" PLANKS | SPECS SHEET

<b>PRODUCT DESCRIPTION</b>	<b>Stone-Plastic Composite</b>
<b>DIMENSIONS</b>	<b>7 in x 48 in</b>
<b>THICKNESS</b>	<b>4mm</b>
<b>WEAR THICKNESS</b>	<b>0.5mm   8mil</b>
<b>COLORS</b>	<b>4 Available</b>
<b>PLANKS/CARTON</b>	<b>12</b>
<b>SQ/FT / CARTON</b>	<b>28</b>


① UV Coating  
·Water Proof Superior Stain Anti Color fading

② Wear Resistance Layer  
·Superior Durability, abrasive resistance

③ Design Layer  
·Nature Texture and Emboss

④ SPC Core Layer  
·Rigid water proof, Easy click/locksystem installation  
·Stable not contract or expand

⑤ Underlayment  
·Shock and Noise Absorbing  
·Absorb subfloor imperfections

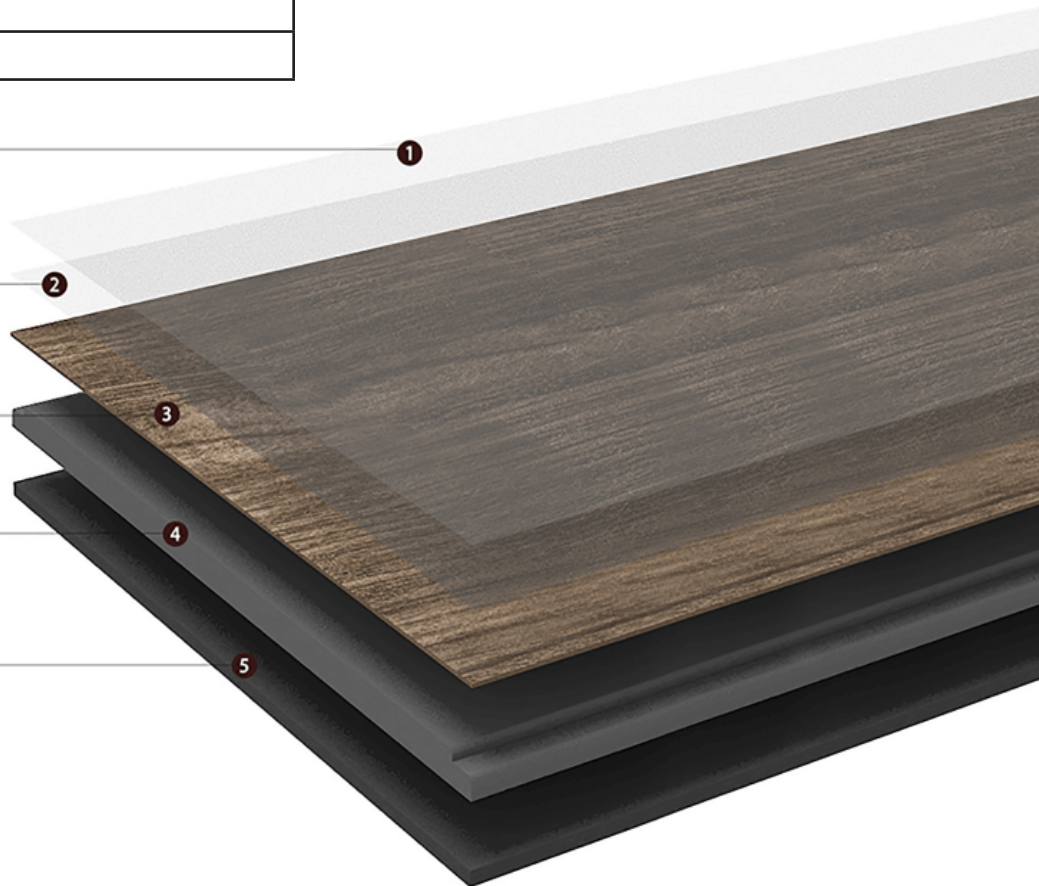

<b>FIRE RESISTANCE</b>	<b>CLASS C - PASS</b>	<b>ASTM E 648</b>
<b>COEFFICIENT OF FRICTION</b>	<b>PASS</b>	<b>DIN 51130 / ASTM D2047-04</b>
<b>SMOKE DENSITY</b>	<b>PASS</b>	<b>ASTM E662-09</b>
<b>SHORT TERM INDENTATION</b>	<b>PASS</b>	<b>ASTM F1914-98</b>
<b>STATIC LOAD</b>	<b>PASS</b>	<b>EN 433 / ASTM F970-07</b>
<b>STAIN RESISTANCE</b>	<b>PASS</b>	<b>ASTM F925</b>
<b>PEEL RESISTANCE</b>	<b>PASS</b>	<b>EN 431</b>
<b>SHEAR RESISTANCE</b>	<b>PASS</b>	<b>EN 532</b>
<b>COLOR FASTNESS TO LIGHT</b>	<b>PASS</b>	<b>EN 649</b>
<b>DIMENSIONAL STABILITY</b>	<b>PASS</b>	<b>EN434</b>
<b>WEAR RESISTANCE</b>	<b>HIGH</b>	<b>ASTM F510-93</b>
<b>FORMALDEHYDE EMISSION (AIR)</b>	<b>NONE DETECTED - E1 RATING*</b>	<b>EN 7171-1</b>

\* E1 Standard not to exceed 0.124 mg/m<sup>3</sup> air. Method Detection Limit 0.080 mg/m<sup>3</sup> air.