

RIGID WOOD | SPC | 9" PLANKS | SPECS SHEET

PRODUCT DESCRIPTION	Stone-Plastic Composite
DIMENSIONS	8.9 in x 61 in
THICKNESS	6mm
WEAR THICKNESS	0.5mm 20mil
COLORS	12 Available
PLANKS/CARTON	8
SQ/FT / CARTON	30.16


① UV Coating
·Water Proof Superior Stain Anti Color fading

② Wear Resistance Layer
·Superior Durability, abrasive resistance

③ Design Layer
·Nature Texture and Emboss

④ SPC Core Layer
·Rigid water proof, Easy click/locksystem installation
·Stable not contract or expand

⑤ Underlayment
·Shock and Noise Absorbing
·Absorb subfloor imperfections

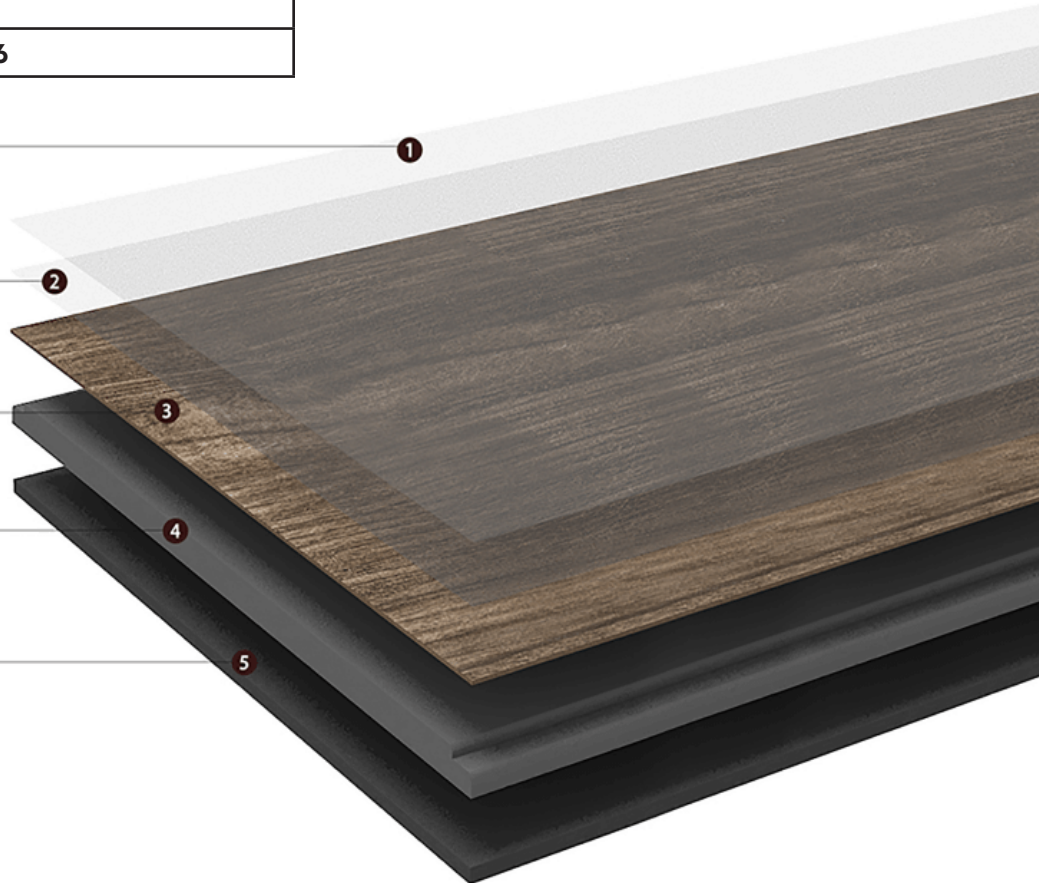

FIRE RESISTANCE	CLASS C - PASS	ASTM E 648
COEFFICIENT OF FRICTION	PASS	DIN 51130 / ASTM D2047-04
SMOKE DENSITY	PASS	ASTM E662-09
SHORT TERM INDENTATION	PASS	ASTM F1914-98
STATIC LOAD	PASS	EN 433 / ASTM F970-07
STAIN RESISTANCE	PASS	ASTM F925
PEEL RESISTANCE	PASS	EN 431
SHEAR RESISTANCE	PASS	EN 532
COLOR FASTNESS TO LIGHT	PASS	EN 649
DIMENSIONAL STABILITY	PASS	EN434
WEAR RESISTANCE	HIGH	ASTM F510-93
FORMALDEHYDE EMISSION (AIR)	NONE DETECTED - E1 RATING*	EN 7171-1

* E1 Standard not to exceed 0.124 mg/m³ air. Method Detection Limit 0.080 mg/m³ air.