

WILD WOOD | LVT | 6" PLANKS | SPECS SHEET

| | |
|----------------------------|-------------------|
| PRODUCT DESCRIPTION | Luxury Vinyl Tile |
| DIMENSIONS | 6 in x 36 in |
| THICKNESS | 2mm |
| WEAR THICKNESS | 0.2mm 8mil |
| COLORS | 10 Available |
| PLANKS/CARTON | 24 |
| SQ/FT / CARTON | 36 |


① UV Coating
·Water Proof Superior Stain Anti Color fading

② Wear Resistance Layer
·Superior Durability, abrasive resistance

③ Design Layer
·Nature Texture and Emboss

④ Middle Vinyl Layer
·Extra stability and support

⑤ Vinyl backing layer
·High resistance to pressure

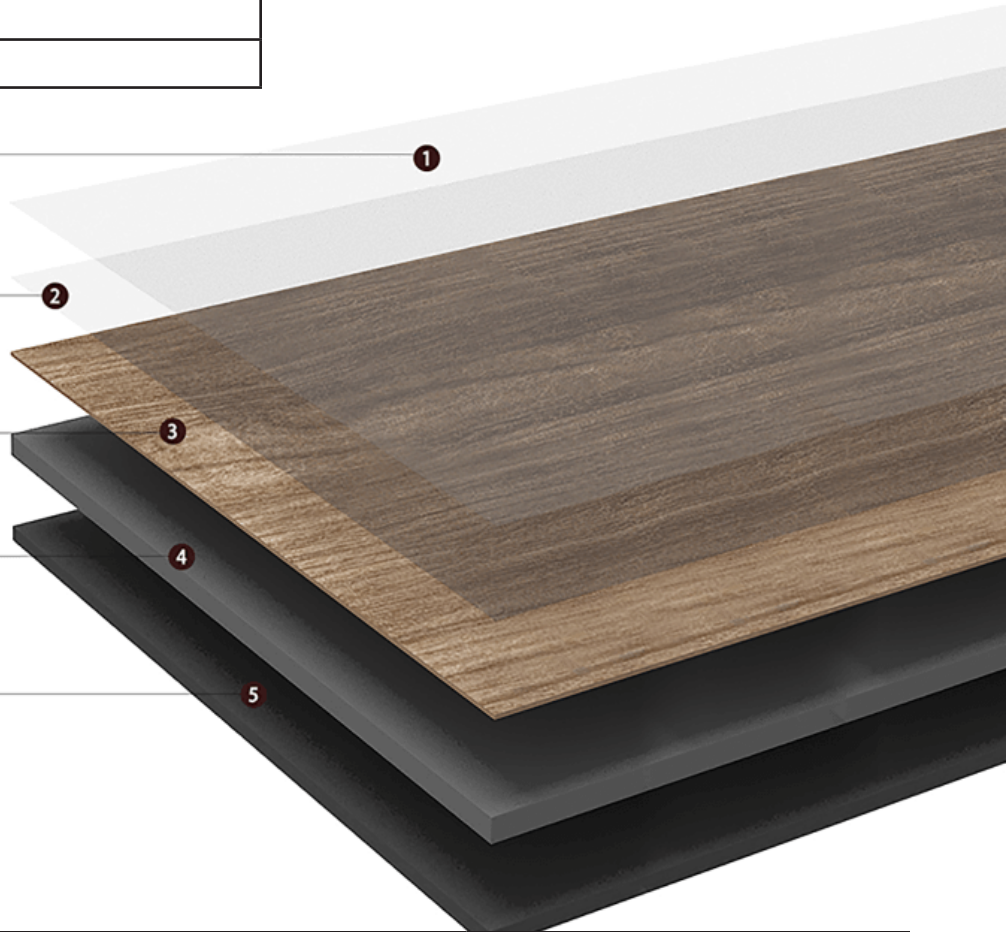

| | | |
|------------------------------------|----------------------------|---------------------------|
| FIRE RESISTANCE | CLASS C - PASS | ASTM E 648 |
| COEFFICIENT OF FRICTION | PASS | DIN 51130 / ASTM D2047-04 |
| SMOKE DENSITY | PASS | ASTM E662-09 |
| SHORT TERM INDENTATION | PASS | ASTM F1914-98 |
| STATIC LOAD | PASS | EN 433 / ASTM F970-07 |
| STAIN RESISTANCE | PASS | ASTM F925 |
| PEEL RESISTANCE | PASS | EN 431 |
| SHEAR RESISTANCE | PASS | EN 532 |
| COLOR FASTNESS TO LIGHT | PASS | EN 649 |
| DIMENSIONAL STABILITY | PASS | EN434 |
| WEAR RESISTANCE | HIGH | ASTM F510-93 |
| FORMALDEHYDE EMISSION (AIR) | NONE DETECTED - E1 RATING* | EN 7171-1 |

* E1 Standard not to exceed 0.124 mg/m³ air. Method Detection Limit 0.080 mg/m³ air.